


ORDERING SPECIALS

The following information is a guide to measuring radiator cores. This page may be photocopied and used to fax requests for un-listed or special cores.

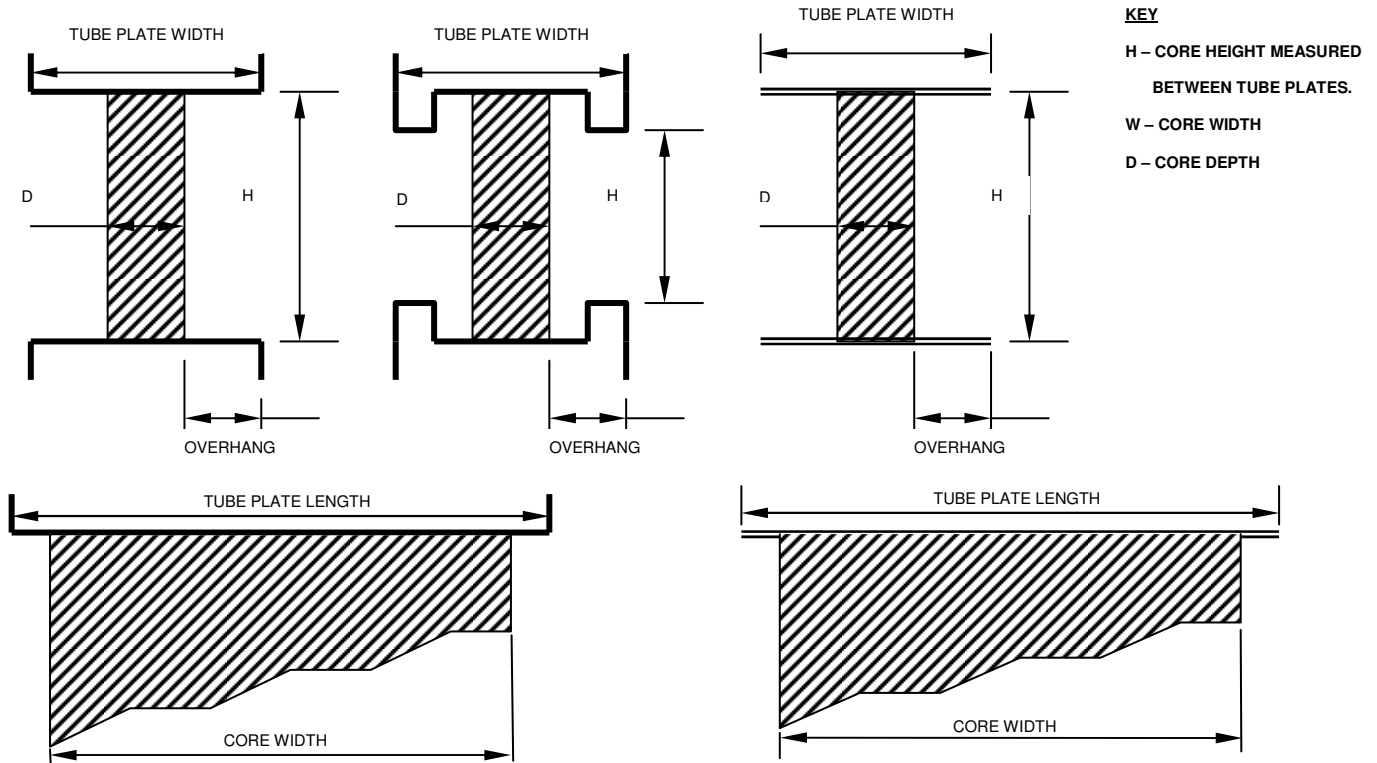

KEY
 H – CORE HEIGHT MEASURED
 BETWEEN TUBE PLATES.
 W – CORE WIDTH
 D – CORE DEPTH

CORE DETAILS	
HEIGHT	PATTERN (Flat fin K,L,R,S or Z)
WIDTH	(Pack H,Q,V or X)
DEPTH	FIN TYPE
NUMBER OF ROWS	(Standard louvre or plain/dimpled)
OTHER REQUIREMENTS:	FINS PER INCH
	CORE FINISH (Plain or tinned fin)

HEADER PLATE DETAILS	SOLDERED – Turned-up	SOLDERED – Flat	DRILLED
TYPE Delete as necessary			
	TOP	BOTTOM	
HEADER WIDTH	
HEADER LENGTH If open ends, please state.	
CORNERS Square corners or 1/4", 3/8", 1/2" radius Standard tube plate turn up is 8mm.	
POSITION State overhang to front or central.	
THICKNESS State gauge required	

CUSTOMER NAME:.....	CONTACT:.....
FAX NUMBER:	PRICE QUOTED:.....

FAX ENQUIRY TO: 0141 550 5850
OR E-MAIL TO: sales@gm-radiator.com